

Step 1. Remove skid board, see note.* Shown with shelves installed.

Carefully read the contents of these instructions, as the instructions indicate the correct step by step procedure to assemble the product. In the event of assembly problems or missing parts, please call our customer service department at **616-842-5330**.

CAUTION:

ASSEMBLED UNIT IS VERY HEAVY. DO NOT ATTEMPT TO LIFT OR MOVE WITHOUT ASSISTANCE.

THE MANUFACTURER OF THIS DISPLAY ASSUMES NO LIABILITY FOR INJURY CAUSED BY IMPROPER ASSEMBLY / INSTALLATION OF THIS DISPLAY.



WARNING:

This product contains chemicals known to the State of California to cause cancer and birth defects or other reproduction harm.

For more information, go to www.P65Warnings.ca.gov

TOOLS REQUIRED:

- #2 PHILIPS BIT + DRIVER
- CARPENTER LEVEL
- 7/16" WRENCH


NOTE: DO NOT use impact driver on screws

305900IS 07-22-2022 © 2022 Harbor Retail



Leveling Fixture

Once fixtures are at desired height, the fixtures must be properly leveled, prior to connecting them.

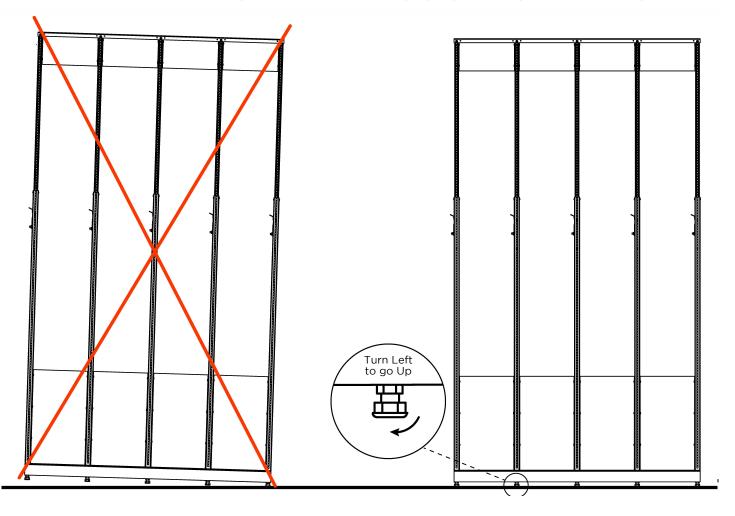


305900IS 07-22-2022 © 2022 Harbor Retail




Telescoping Fixture Adjustment


1. Loosen Lock Knobs.

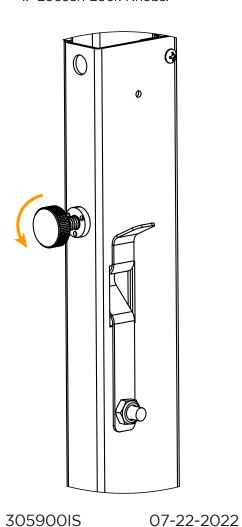

2. Adjust Fixture to Height.

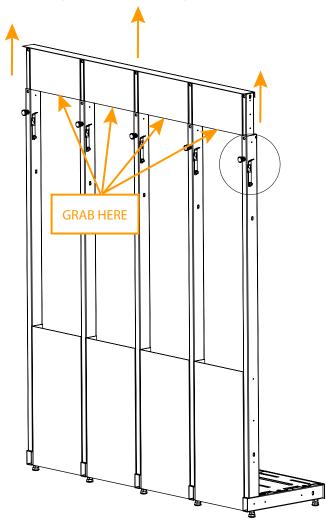

3. Tighten Lock Knobs. When the fixture is at the desired height, the lock knobs MUST be tightened.

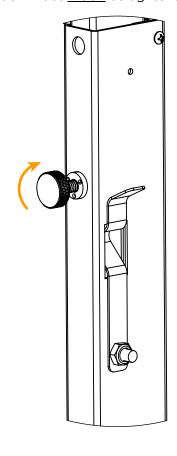




Installing Spacers

Spacers are required when connect more than one fixture together.

All fixtures use ¼ inch spacers, located in the hardware kit attached to the fixture.



Insert spacers into uprights.
(3) on Lower Leg
(1) on Upper Leg

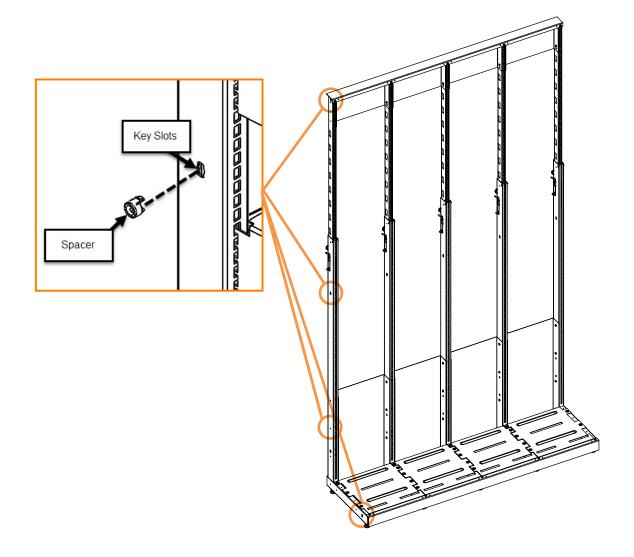


305900IS

07-22-2022



Fixture to Fixture Connection

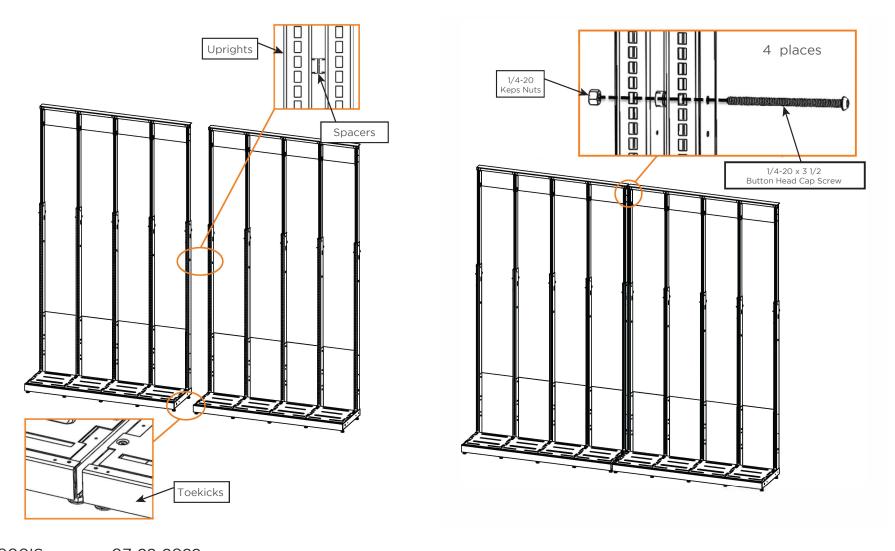


305900IS 07-22-2022 © 2022 Harbor Retail




Securing Fixture to the Wall

Secure to wall using wall mount, screws, and anchors found in hardware kit.

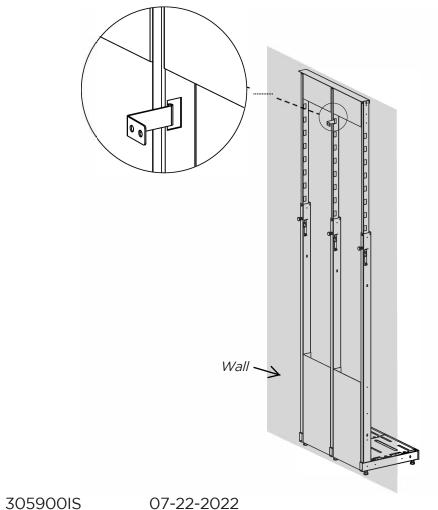


Alternative mounting method: using wire cable, wall mount, screws and anchors.

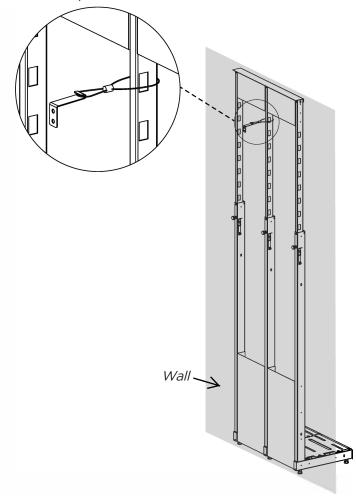




Slot Extension Brackets


1. Insert "T" into slot.



2. Rotate & push bottom into hole above lower leg.



3. Push down flush with lower leg.



Slot Extension Bracket allows for a shelf to be placed at the point where the Infinity Fixture telescopes.


305900IS

07-22-2022




Header Installation


1. Top row of shelves placed in 19th slot from the top of the fixture. If more merchandising space is needed, header shelves can be raised to increase space below.

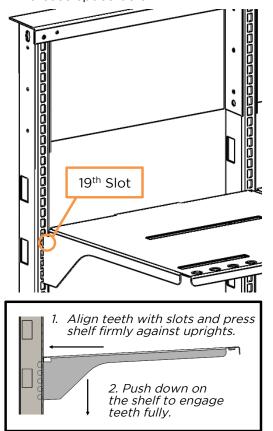


2. Place Header onto shelves and align slots in header base with shelf slots.



3. Secure Header to shelves using provided wing nuts, washer, and bolts. Must be secured at 4 locations.

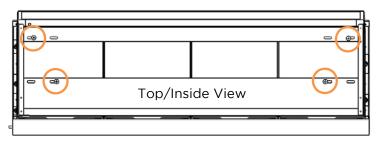



NOTE: Headers can be installed in any location on fixture, even across fixture connection points.

305900IS

07-22-2022



Shelves

